查询RP50-2405S供应商

Features

- Single Outputs up to 15A
- Input/Output 1.6kVDC Isolation
- Adjustable Output Voltage
- No Minimum Load
- Under -Voltage Lockout
- Industry Standard Footprint
- Fixed Operating Frequency
- Halt Tested
- Compact 61.0 x 57.91 x 12.7mm Package
- High Efficiency to 91%

INNOLINE
DC/DC-Converter

RP50-S Series

50 Watt Single Output

RECOM

Selection Guide

Part Number	Input Voltage	Output Voltage	Output Current	Line Regulation	Load Regulation	Input Current	Efficiency
Single Output	(VDC)	(VDC)	(A)	(mV)	(mV)	(A)	%
RP50-241.8S	18 – 36	1.8	15	4	6	1.36	86
RP50-242.5S	18 – 36	2.5	15	5	8	1.86	87
RP50-243.3S	18 – 36	3.3	15	7	10	2.40	89
RP50-2405S	18 – 36	5	10	10	15	2.40	90
RP50-2415S	18 – 36	15	3.3	30	45	2.40	89
RP50-481.8S	36 – 75	1.8	15	4	6	1.36	87
RP50-482.5S	36 – 75	2.5	15	5	8	1.86	89
RP50-483.3S	36 – 75	3.3	15	7	10	2.40	90
RP50-4805S	36 – 75	5	10	10	15	2.40	91
RP50-4815S	36 – 75	15	3.3	30	45	2.40	90

Notes:

1. Maximum output deviation is 10% inclusive of remote sense. If remote sense is not being used, the +Vsense should be connected to its corresponding +Vout
2. Measured with a 1uF M/C and a 10uF T/C.
3. An external filter capacitor is required for normal operation. The capacitor should be capable of handing 1A ripple current for 48V/24V models. RECOM suggests: Nippon chemi-con KMF series, 220µF/100V, ESR 90mΩ.
4. The negative/ positive logic and pin length are optional (see table). The pin voltage is referenced to negative input.
5. Heat sink is optional and P/N: 7G-0021, 7G-0022, 7G-0023, 7G-0024.
6. The RP50 meets level A and level B conducted emissions only with external components connected before the input pin to the converter.
7. Maximum value at nominal input voltage and full load.
8. Typical value at nominal input voltage and full load.
9. BASEPLATE GROUNDING : Base-plate should be grounded at one of the four screw bolts prior to operation.
10. The converter is provided by basic insulation.
11. "**N**" for Negative remote ON/OFF.
12. "**P**" for Positive remote ON/OFF.

Specifications (refer to the standard application circuit, Ta: 25°C)

Input Voltage Range	18 - 36, 36-75VDC	(24, 48V nom.)
Unde-Voltage Lockout Start-up Voltage	24V input 48V input	17V typ. 34V typ.
Unde-Voltage Lockout Shuntdown Voltage	24V input 48V input	15V typ. 32V typ.
Input Filter (Note 3)		L-C type
Input voltage variation	dv/dt	5V/ms max (Complies with ETS300 132 part4.4)
Input Surge Voltage 100mS max	24V input 48V input	50VDC 100VDC
Start up time	Nominal Vin and constant resistive load	25mS typ.
Input Reflected-Ripple Current	24V input	50mAp-p
(5Hz to 20Hz, 12uH Source inpedance)	48V input	20mAp-p
Remote ON/OFF (Note 4) (Positive logic) (Negative logic)	 ON=Open or 3.5V < Vr < 15V, OFF=Short or 0V < Vr < 1.2V, ON=Short or 0V < Vr < 1.2V, OFF=Open or 3.5V < Vr < 15V,	 I_{IN}=50µA max. I_{IN}=1mA max. I_{IN}=1mA max. I_{IN}=50µA max.
Continuous Output Power		50W max.
Output Voltage Accuracy (Full load and nominal Vin)		±1.5%
Output Voltage Adjustment (Note 1)		+10%, -20%
Minimum Load		0%
Line Regulation	LL to HL at FL	See table
Load Regulation	0% to 100% FL	See table
Remote Sense (Note 1)		10% of Vout
Ripple and Noise 20MHz bandwidth (Note 2)		100mVp-p
Temperature Coefficient		±0.02%/ºC
Transient Response Recovery Time (25% load step change)		200us
Over Voltage Protection threshold (Hiccup)		115% ~ 130% of Vout
Over Current Protection threshold		110% ~ 140% of Iout Rated
Short Circuit Protection		Hiccup, Automatic recovery
Efficiency (at nominal input voltage, full load)		up to 91%.
Isolation Voltage	Input to Output Input to Case Output to Case	1.600VDC min. 1.000VDC min. 1.000VDC min.
Isolation Resistance		10^7 ohms min.
Isolation Capacitance		2.500pF max.
Operating Frequency		300KHz typ.
Operating Temperature Range		-40ºC to +100ºC (base plate)
Over Temperature Protection		110°C
Storage Temperature Range		-55°C to +125°C
Humidity max., Non-condensing		95%
Thermal Shock		MIL-STD-810D

Continued next page

Specifications (refer to the standard application circuit, Ta: 25°C)

Vibration	10 ~ 55Hz 2G, 3minutes period, 30minutes analog	X, Y and Z
Conducted Emissions	EN55022 (Note 7)	Level A
	EN55022 (Note 7)	Level B
Radiated Emisssions	EN55022	Level A
ESD	EN61000-4-2	Perf. Criteria2
Radiated Immunity	EN61000-4-3	Perf. Criteria2
Fast Transient	EN61000-4-4	Perf. Criteria2
Surge	EN61000-4-5	Perf. Criteria2
Conducted Immunity	EN61000-4-6	Perf. Criteria2
Case Material		Open with Aluminium base plate
Weight		50g
MTBF Bellcore TR-NWT-000332, Tc=40°C, Io=80% max.		3 x10^6 hrs

Characteristics

Efficiency VS Output Load

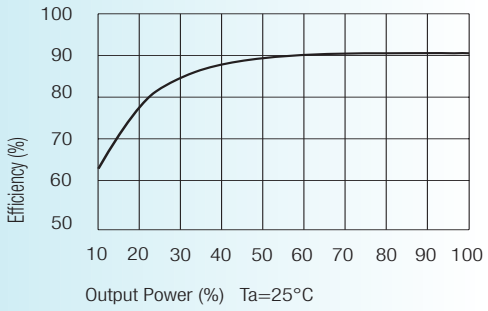

48V Input Without Heatsink

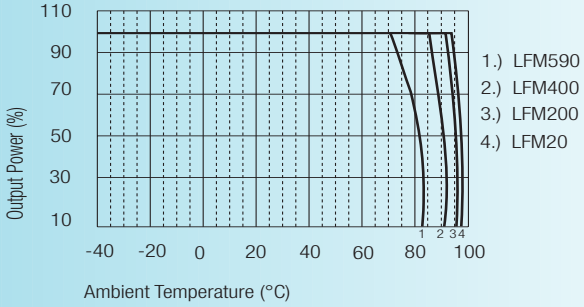

48V Input With Heatsink (7G-0022)

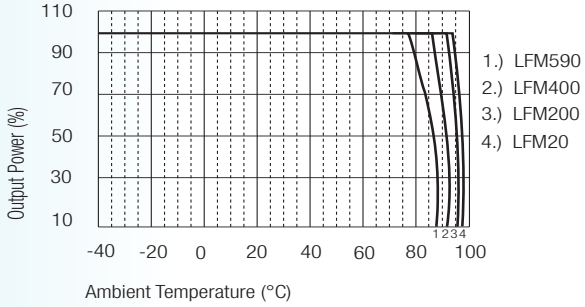

Package Style and Pinning (mm)

3rd angle projection

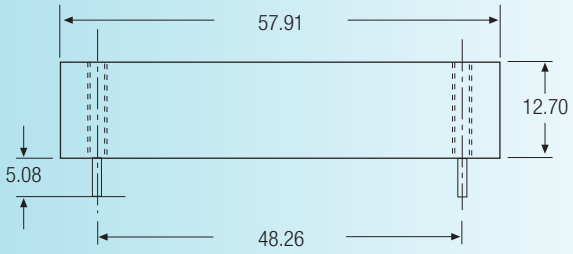

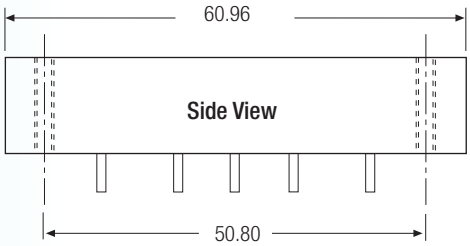

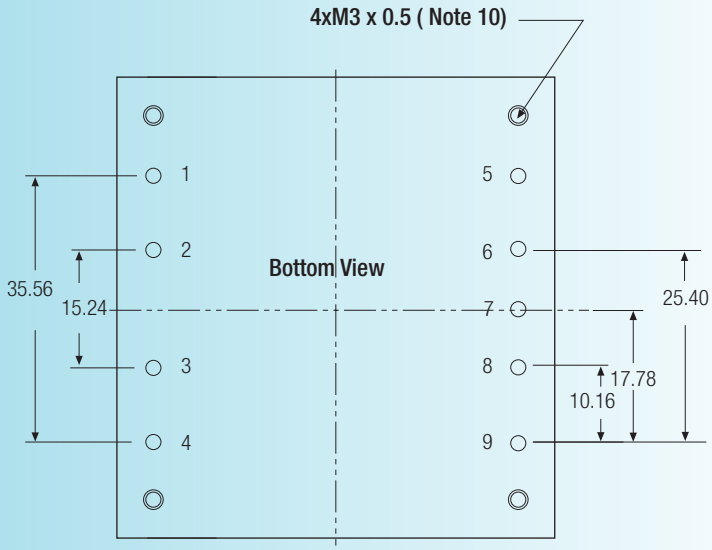

Pin Connections

Pin #	Function	Pin Ø
1	–Vin	1.016 mm
2	Case	1.016 mm
3	Remote ON/OFF	1.016 mm
4	+Vin	1.016 mm
5	–Vout	2.032 mm
6	–Vsense	1.016 mm
7	Trim	1.016 mm
8	+Vsense	1.016 mm
9	+Vout	2.032 mm

XX.X ± 0.5 mm
XX.XX ± 0.25 mm
Pin pitch tolerance 0.35mm

External Output Trimming

Output can be externally trimmed by using the method shown below.
See application notes for values.

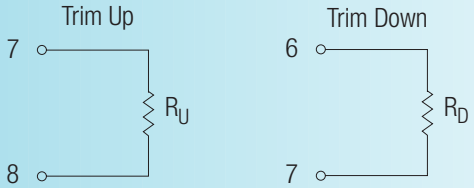

Product Options Table

Option	Suffix
Negative remote ON/OFF logic, 0.20” pin length (standard)	
Negative remote ON/OFF logic, 0.145” pin length	L
Negative remote ON/OFF logic, 0.11” pin length	K
Positive remote ON/OFF logic, 0.20” pin length	P
Positive remote ON/OFF logic, 0.145” pin length	S
Positive remote ON/OFF logic, 0.11” pin length	M

Example: RP50-483.3S/P